

# REED SWITCH

Vernexx, LLC is an authorized Distributor  
for **OKI** Reed Switches

## ORD219

Miniature High-performance


### ■ GENERAL DESCRIPTION

The ORD219 is a small single-contact reed switch designed for general control of medium-level loads less than 100 V. The contacts are sealed within the glass tube with inert gas to maintain contact reliability.

### ■ FEATURES

- (1) Reed contacts are hermetically sealed within a glass tube with inert gas and do not receive any influence from the external atmospheric environment.
- (2) Quick response
- (3) The structure comprises the operating parts and electrical circuits arranged coaxially. Reed switches are suited to applications in radio frequency operation.
- (4) Reed switches are compact and light weight.
- (5) Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life.
- (6) With a permanent magnet installed, reed switches economically and easily become proximity switches.

### ■ EXTERNAL DIMENSIONS (Unit: mm)

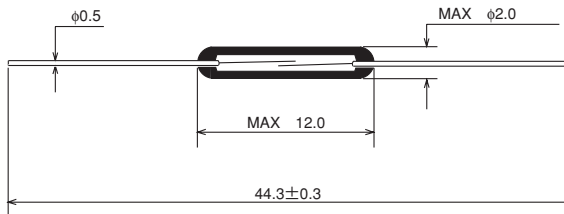

### ■ APPLICATIONS


- Automotive electronic devices
- Control equipment
- Communication equipment
- Measurement equipment
- Household Appliances

■ ELECTRICAL CHARACTERISTICS


| Parameter                 | Rated value                           | Unit |
|---------------------------|---------------------------------------|------|
| Pull-in Value (PI)        | 10~30                                 | AT   |
| Drop-out Value (DO)       | 5min                                  | AT   |
| Contact resistance (CR)   | 100max                                | mΩ   |
| Breakdown voltage         | 200min                                | VDC  |
| Insulation resistance     | 10 <sup>9</sup> min                   | Ω    |
| Electrostatic capacitance | 0.3max                                | pF   |
| Contact rating            | 10                                    | VA   |
| Maximum switching voltage | 100 <sup>(DC)</sup> / <sub>(AC)</sub> | V    |
| Maximum switching current | 0.5                                   | A    |
| Maximum carry current     | 1.0                                   | A    |

3


(1) Drop-out Value vs. Pull-in Value

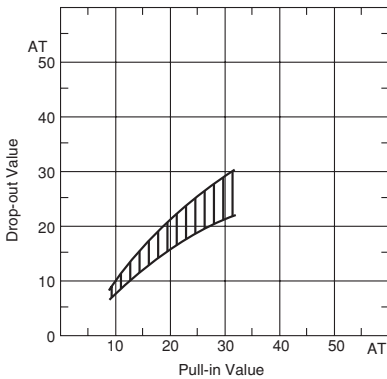


(2) Contact resistance

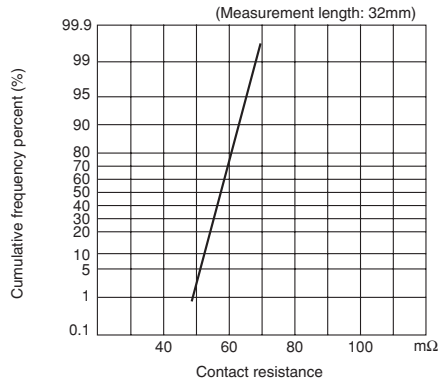


(3) Breakdown voltage

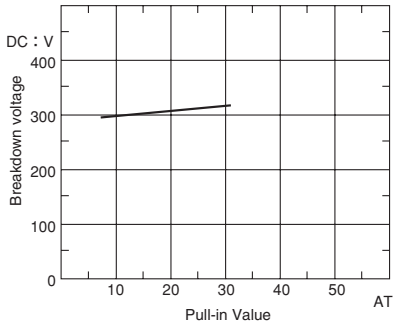

(4) Insulation resistance

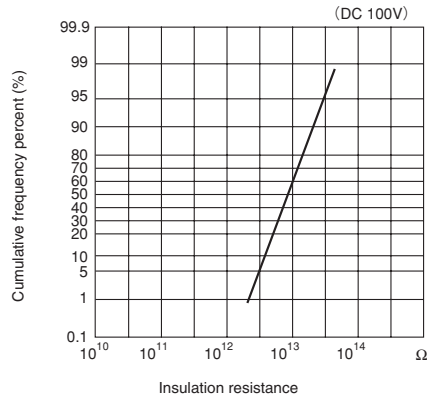


(5) Electrostatic capacitance

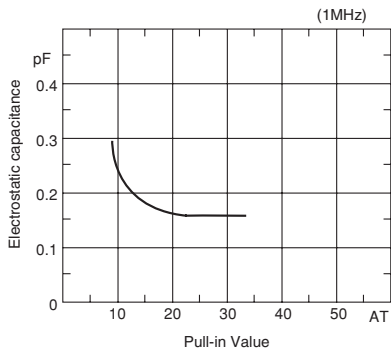


■ OPERATING CHARACTERISTICS

| Parameter                   | Rated value | Unit |
|-----------------------------|-------------|------|
| Operate time                | 0.4max      | ms   |
| Bounce time                 | 0.3max      | ms   |
| Release time                | 0.05max     | ms   |
| Resonant frequency          | 5900±400    | Hz   |
| Maximum operating frequency | 500         | Hz   |


(1) Operate time

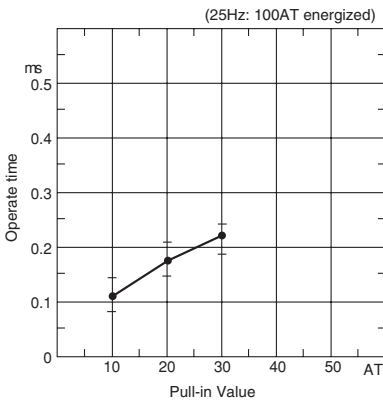


(2) Bounce time

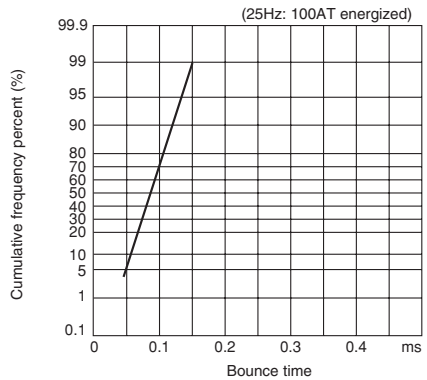

(3) Release time

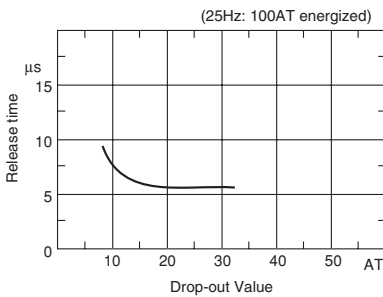


(4) Resonant frequency

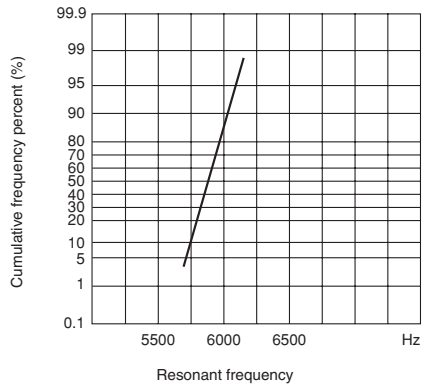


3

■ MECHANICAL CHARACTERISTICS

(1) Lead tensile test (static load)

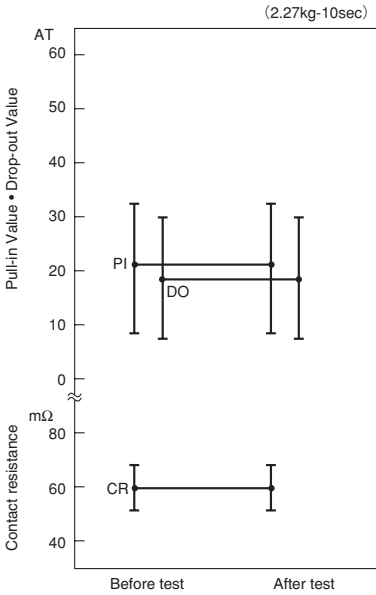


(2) Lead tensile strength

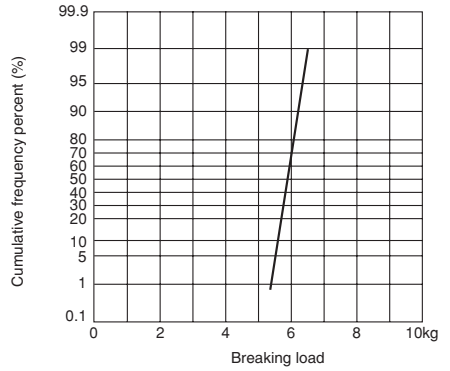

3


■ ENVIRONMENTAL CHARACTERISTICS

(1) Temperature characteristics

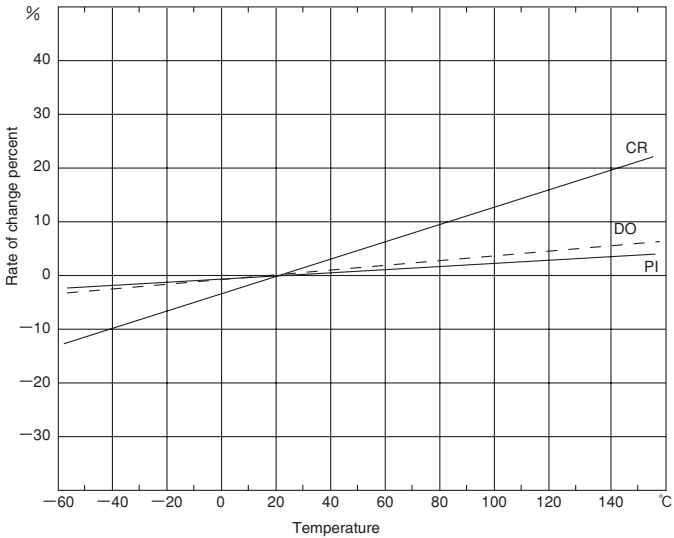


3


(2) Temperature cycle

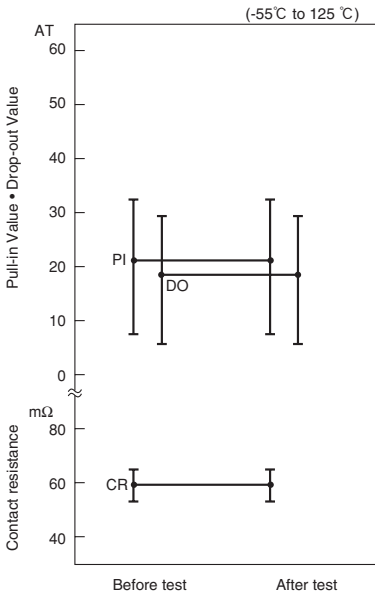


(3) Temperature and humidity cycle

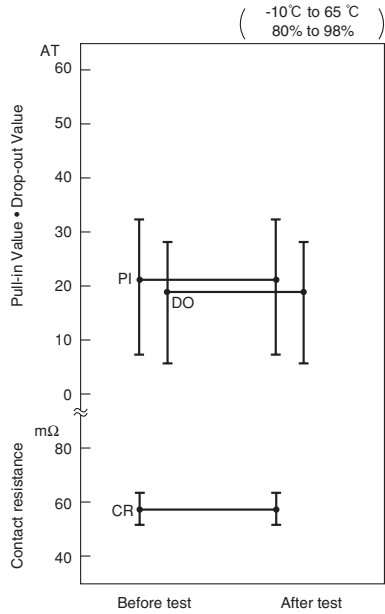

(4) High temperature storage test

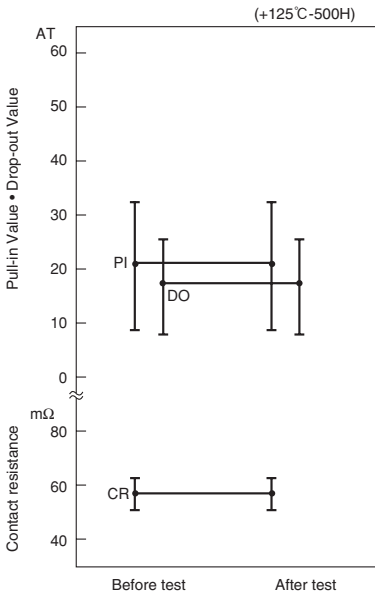


(5) Low temperature storage test

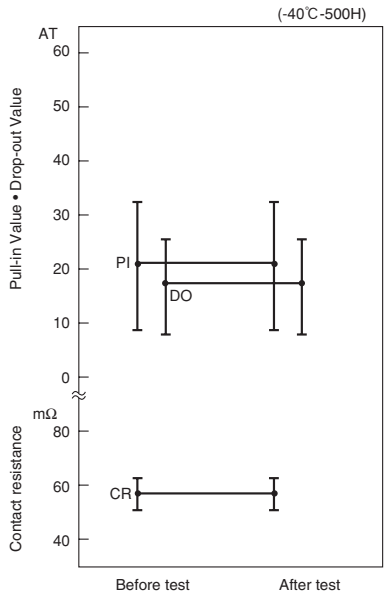


(6) Shock test

1) Electrical characteristics

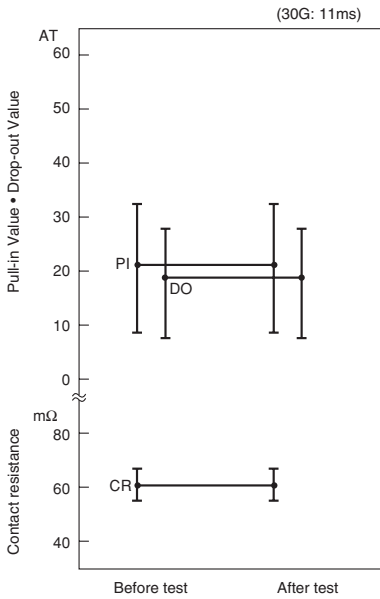


2) Misoperation area

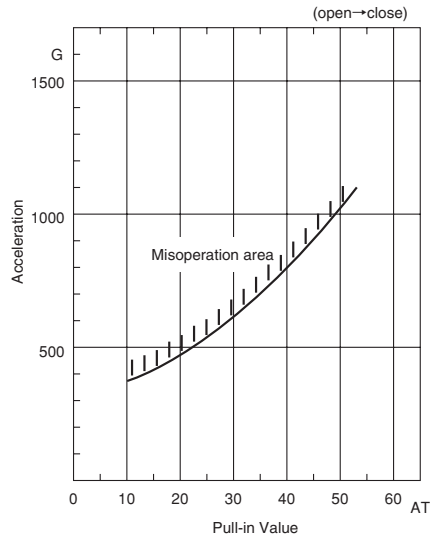


3

(7) Vibration test

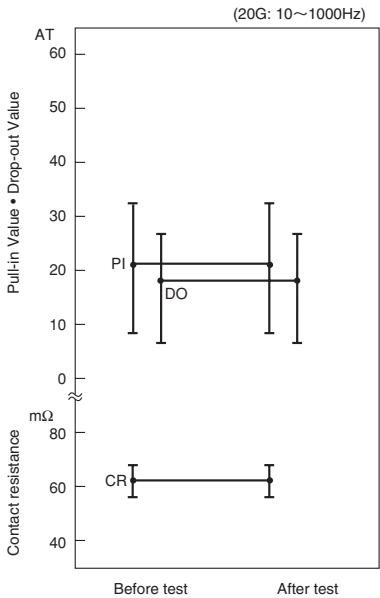


■ LIFE EXPECTANCY DATA: ORD219

Load conditions  
 Voltage: 5VDC  
 Current: 100 A , 1mA , 5mA  
 Load: Resistive load

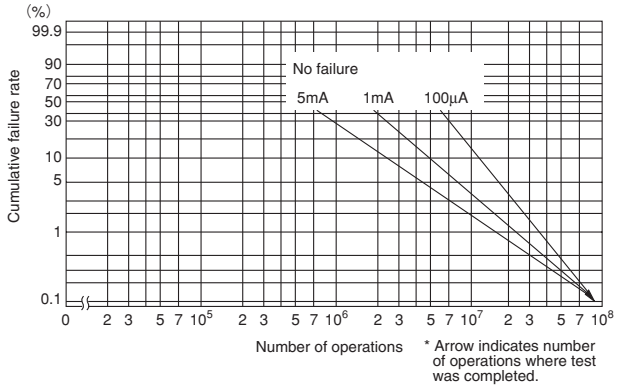

3

Load conditions  
 Voltage: 12VDC  
 Current: 5mA , 10mA , 100mA  
 Load: Resistive load

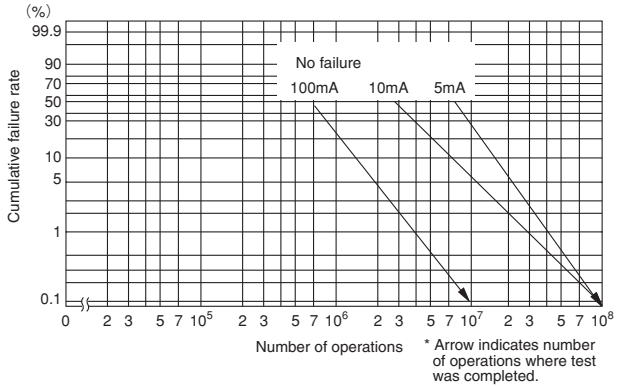

Load conditions  
 Voltage: 24VDC  
 Current: 100mA , 200mA , 400mA  
 Load: Resistive load

